



How to REMOVE a sink faucet! <u>TOOLS!</u>

Hands!

Adjustable Wrench!




How to REMOVE a sink faucet! <u>Parts!</u>








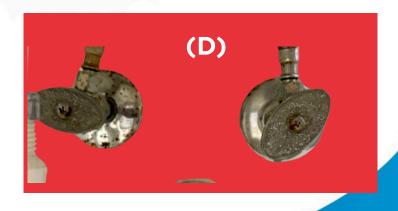



1. Locate the hot and cold water shut off valves (D) under the sink. Turn both knobs to the RIGHT to turn off. NOTE: If your valves are STILL leaking after Step 1, you will need to turn off the water to the whole house by turning off the main water shut off for the house.



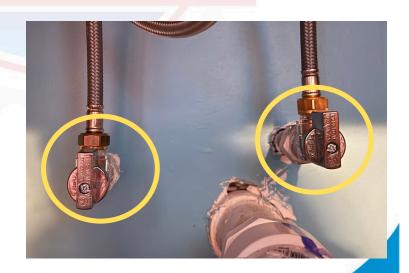



2. Unscrew the water lines (C) from the valves or adapters.





3. Unscrew any plastic brackets (B) holding the faucet down onto the sink/vanity top/countertop. Lift faucet







CONGRATS! YOU HAVE JUST REMOVED YOUR FIRST FAUCET!!

GIVE YOURSELF A
PAT ON THE BACK!
WOOT WOOT!